




# Z200 Standard Wax/Resin

## Product features >>

Z200 Standard Wax/Resin Ribbon offers our most economical wax/resin thermal transfer printing solution while providing consistent performance on a wide variety of materials. Designed for speeds up to 6ips while printing at nominal energy settings, with its wide printing range. It can be compatible with all kinds of barcode printers with low energy printing.

## Recommended substrates >>

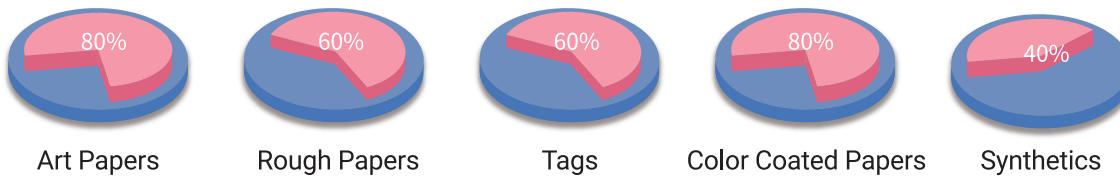

## Printing characteristics >>

Ink color	Black
Color density	≥1.8 (test on X-Rite tester)
Abrasion resistance	≥30 times (200g weight, test on coated papers)


## Recommended printing conditions >>

Printer mode



Flat head

Print speed

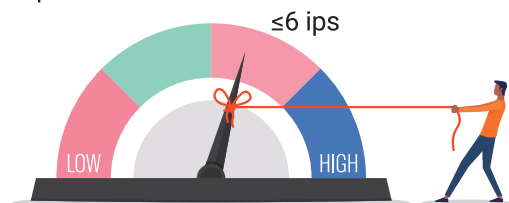


Desktop printers, Industrial printers

※ Depending on the type of printer and print carrier, the print quality and image durability may vary.




Quality starts with Our film



# Z200 Standard Wax/Resin



## Technical specifications >>

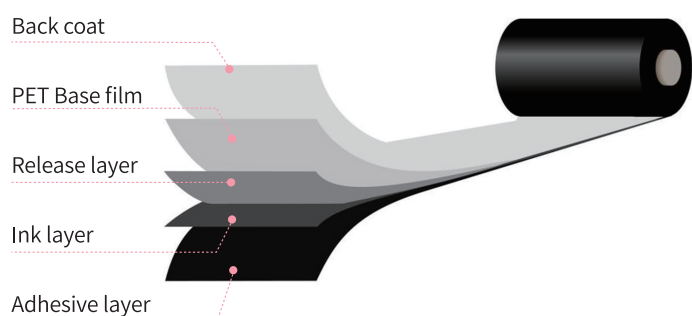

Base film	BOPET
Total ribbon thickness (μm)	6.9±0.5
Storage conditions	-5°C~40°C 20%~85% Relative Humidity
Base film thickness (μm)	4.5±0.2
Ink melting point	88°C
Shelf life	1 year

## Certified product >>



RoHS 2.0



REACH



ISO9001/14001/45001



MSDS




ISEGA

## Application scenario >>



Commercial retail



Storage



Logistics



Nursery gardens  
and flowers




Fixed assets



Clothing tag




Luggage



Pre packaging



Production lines



Food packaging

Zhuoli Imaging Technology Co., Ltd.

Tel: +86 391 3565113

Email: sales@jzzl.com

Website: www.jzzl.com

Address: No.959, Nanhai West Road, Jiaozuo, Henan, China